



The  
Patent  
Office

PCT/GB 00/00141



INVESTOR IN PEOPLE

GB00  
00141

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

EU

REC'D 04 FEB 2000


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

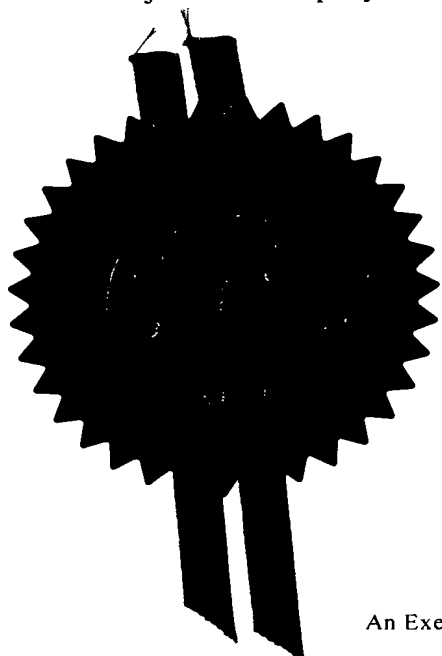

Signed *Andrew Gensy*  
Dated 28 January 2000





# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

BP-08-1314

2. Patent application number

(The Patent Office will fill in this part)

**9900543.1**

11 JAN 1999

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

MBM TECHNOLOGY LIMITED  
Victoria Road  
Portslade  
Brighton  
East Sussex  
BN41 1YH

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

3562446002

4. Title of the invention

SNATCH CONNECTORS

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

PHILLIPS & LEIGH  
7 Staple Inn  
Holborn  
London  
WC1V 7QF

Patents ADP number (*if you know it*)

0001289001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)


8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	6
Claim(s)	2
Abstract	-
Drawing(s)	9 + 9 

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1+2
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	1
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Phillips & Leigh*

Date

PHILLIPS & LEIGH

11.01.99

12. Name and daytime telephone number of person to contact in the United Kingdom

Martin Hammler

0171 405 0133

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Snatch Connectors

This invention relates to snatch connectors providing connection/disconnection of electrical or fluid circuits extending between two separable bodies. For example a snatch connector may be employed to connect a refrigeration unit or charging circuit on a road vehicle to a fixed (stationary) power supply, ensuring safe disconnection of the electrical power if the vehicle is inadvertently driven away without first manually disconnecting the circuit. Other applications for snatch connectors include:-

- 1) connecting ship to shore service lines
- 2) emergency disconnect packages, connectors and interfaces for ROV (remote operated vehicle) manipulation, used in subsea oil and gas production
- 3) electrical connections for loads dropped or ejected from aircraft or other moving vehicles.

It is necessary for these connectors to be positively and safely separated to avoid damage to the electrical/fluid circuit and its anchoring points on the separated bodies. This function is normally achieved by firmly securing a first half of the connector to a first one of the bodies and fitting the second half of the connector at the end of a flexible cable or conduit leading to the second body. A lanyard loop is then secured between a fixed strong-point on the second body and the connector second half, so that as the bodies separate, the lanyard is tensioned and releases a spring loaded coupling sleeve on the connector, thereby allowing the two halves to separate. The length of the lanyard loop is shorter than the cable or conduit, which is therefore not subjected to excessive strain as the connector halves are pulled apart.

In some applications, for example where the first body is a variable load releasable from an aircraft, the second connector half may have to co-operate with a variety of different first connector halves, in various different connected positions, for different loads. In such cases it can be difficult to fit the lanyard to ensure proper disconnection whatever the load. Depending upon the type of load it may prove necessary to change the length of the lanyard and the location of the strong-point, entailing major structural changes to the aircraft. It may also be important to provide for stowage of the cable/conduit and lanyard after separation of

the connector halves, e.g. to prevent damage in a vehicle's slipstream or by dragging on the ground.

The present invention provides a snatch disconnection lanyard assembly comprising a  
5 tensioner which may be set to pay out or to pull in the lanyard and when set to pull in, will resist paying out of the lanyard, thereby providing a tensile force for snatch disconnection. To allow the lanyard and an associated connector half to be coupled to a co-operating connector half in a variety of different possible positions, the tensioner is set to pay out the lanyard. Preferably when so set, pulling in of the cable by the tensioner is resisted,  
10 maintaining slack in the lanyard for ready mating of the connector halves. Once the connection has been made up, the tensioner can be set to pull in, whereupon the slack in the lanyard is taken up and the lanyard is maintained under slight tension. This tension is however designed to be at a level insufficient to separate the connector halves. Then when the tensioner, lanyard and its associated connector half are moved bodily away from the other  
15 connector half, paying out of the lanyard is resisted and tension in the lanyard increases to the point where the connector halves are pulled apart.

Where for example the connector halves are respectively attached to a vehicle and its load, because the lanyard is maintained under tension, inertial movements of the load relative  
20 to the vehicle or aerodynamic forces acting on the load could cause premature disengagement of the connector. To help prevent this, in accordance with a second independent aspect of the invention, a resilient link is connected to the lanyard, opposed ends of the link each carrying an abutment, the respective abutments being brought into contact with each other when the link has been deformed by a predetermined amount, thereby increasing the stiffness of the  
25 link and allowing transmission of snatch disconnection forces. The link allows limited relative movement of the vehicle and its load prior to engagement of the abutments.

Preferred features of the invention are in the dependent claims and also in the following illustrative description, made with reference to the drawings in which:-

Fig. 1 is a perspective view of a snatch disconnection lanyard assembly embodying the invention;

Fig. 2 is an exploded perspective view of a cable reel housing of the lanyard assembly of fig. 1, and its internal components;

5 Fig. 3 is a plan view of the cable reel ratchet mechanism in its set condition;

Fig. 4 is a plan view of the cable reel ratchet mechanism in its reset condition;

Figs. 5 and 6 show additional details of the ratchet mechanism;

Fig. 7 shows a hexagonal key hole and an associated further ratchet mechanism, and

Figs. 8 and 9 show a centrifugal brake for the reel.

10

Referring to figs. 1 and 2 the tensioner assembly comprises a spreader bar (4) on a miniature wire rope, or cable (6), which is attached to a reel (8, fig.2) formed from two halves (8a,8b) within a housing (2). As shown in fig.2 the housing includes a base (3) and a cover (5). The spreader bar ensures that the connector snatch lanyard (10) is tensioned substantially  
15 parallel to its disengagement direction. This approach ensures minimal snatch disengagement forces and maximum snatch lanyard life. Ends of the lanyard (10) are connected at diametrically opposed positions to a connector half (7). A complementary mating connector half (9) is firmly mounted to a releasable load (32). The connector half (9) is fixed to the end of a flexible wiring harness (11).

20

As best seen in fig. 2, the reel (8) is rotationally spring loaded by a coiled 'clockspring' (14) extending between a fixed spindle (13) and a reel slot (15). Thus the cable (6) is normally under tension as the spring attempts to wind it further onto the reel. It will be apparent that the cable cannot act as a fixed anchor-point unless the reel is prevented from  
25 rotating in the reverse direction. This function is provided by an escapement pawl, or latch, (16) which engages with a toothed wheel (12) rigidly coaxially attached to the reel.

The escapement latch is designed to be spring biased in either direction, dependent on the rotational position of a manually operated lever (18) which is rotated by a hexagonal  
30 key (20, fig. 7) inserted into a matching socket (22) in the lever's shaft. In the position shown in fig. 3, the reel will allow cable to be paid out from the reel with the latch preventing its

return; whereas in fig 4, the spring tension is applied to the cable, and the reel will resist any attempt to pull out more cable. This latter role provides the desired anchor-point function. The lever is biased to the fig. 4 position by a spring loaded plunger (24) acting on a horn (25) formed on the latch housing (26). The latch housing has, between it and the latch, a  
5 torsion spring (28) which provides the spring compliance necessary to allow the latch to be bypassed in one direction at a time, depending on the position of the manually operated lever. In effect, this provides the function of a ratchet which may be set to operate in either direction.

10 It will be apparent that the fig. 3 position of the latch is useful for allowing the flexible wiring harness and its attached connector half to be pulled out of its storage position, for example from a pylon suspended beneath an aircraft, and attached to the other connector half (9) fixed to the load (32). Should the operator inadvertently release the wiring harness during this process but prior to attachment to the load, the harness will not retract back into  
15 the pylon. The fig. 3 position of the latch can only be obtained by full insertion of the key into the hexagonal socket (22) in the operating lever, followed by clockwise rotation of the key and lever (viewed from the key access point).

A detent action on the key prevents reverse rotation of the lever when the key is  
20 inserted and turned. This function is achieved by means of a separate collar (34) axially coincident with the operating lever, and featuring a matching key socket.

The collar can only be rotated in one direction (clockwise), and is prevented from rotating in the opposite direction by a slidable spring loaded pin (36) which engages a series of wedge  
25 shaped recesses (37) machined in the periphery of the collar. So long as the key is rotated and left in place, the latch will therefore remain biased to the paying out mode.

Once the wiring harness has been attached to the load, the key is removed from the socket in the operating lever, and this action allows separate rotation of the lever relative to  
30 the collar, and enables the latch to return to the position in which it allows the clockspring to apply a retraction tension to the cable, and at the same time to prevent any pay-out of cable.



Thus the fully installed wiring harness is held in place, and the cable then acts as a strong point, disconnecting the snatch connector in the event of downward motion of the connector during load release.

5 In order to prevent inadvertent disconnection which might be caused by normal aerodynamically and/or inertially induced load movements which routinely occur during captive carriage, the cable termination spreader (4) is designed to flex slightly, allowing a small amount of downward load movement before becoming substantially rigid and transferring disconnection loads to the lanyard. This effect is obtained by shaping the spreader so that it may bend under nominal lanyard tensions until abutment faces (40) contact each other, whereupon a sudden increase in bending stiffness occurs. In one embodiment of the concept, this contact, and its consequential stiffening effect, are designed to occur at approximately 5mm of downward movement of the lanyard ends, but this principle may be employed to suit other particular requirements.

15

To provide optimum versatility of location of the reel assembly relative to the wiring harness and connector halves, the cable in the preferred embodiment is slidably contained within a flexible sheath (52), in the manner of a bicycle brake cable, so that it may be routed past obstacles without risk of chafing. In this application, the sheath is terminated by an abutment (42) at the reel housing and a load bearing bracket, or strong-point (44) which is firmly attached to the pylon structure by removable pins (46) which enable its position to be re-sited to align with different load connector positions.

25 In view of the importance attached to successful operation of the snatch function, a secondary mechanism is incorporated within the reel assembly, so that failure of the latch to prevent rotation of the reel during load release, is rapidly backed up by alternative locking of the reel via a centrifugally energised pair of sears (48) which lock the reel to the housing cover (5) when the reel rotates at some predetermined velocity. During load ejection, large accelerations are encountered, so a downward velocity of (say) 0.4m/sec would be achieved within 5mm of downward motion of the load. This corresponds to a rotational velocity of the reel of approximately 250rpm, which would be ample to operate the centrifugal brake. The

30

sears are normally held out of engagement with the housing, by springs (54). Fig. 7 shows the sears disengaged from the housing cover, allowing rotation of the reel; whereas fig.9 shows the sears engaged with abutment faces (55) in the cover (5), thereby preventing rotation of the reel.

5

In its preferred forms, use of the invention includes the following advantages:-

- a) It provides a single adjustable strong-point for the snatch connector lanyard.
- b) It applies a continuous but moderate tension to the snatch connector lanyard.
- c) It enables the wiring harness to be attached to the load without disconnecting the  
10 snatch lanyard from the anchor-point.
- d) It ensures that the snatch tension in the connector lanyard is minimised.
- e) It ensures that the anchor-point is as far away from the load as possible, thereby reducing the amount by which the wiring harness is pulled out from its stowed position during load release, and reducing risk of damage to both the harness and its surrounding  
15 structure.
- f) It withdraws the harness as far as possible back to its stowed position after load release.
- g) It helps to achieve foolproof operation by encouraging only the correct sequence of actions.
- h) It provides a back-up operation mode in the event of primary latch failure.

## Claims:-

1. A snatch disconnection lanyard assembly comprising a tensioner which may be set to pay out or to pull in the lanyard and when set to pull in, will resist paying out of the lanyard,  
5 thereby providing a tensile force for snatch disconnection.
2. A lanyard assembly as defined in claim 1 wherein when the tensioner is set to pay out the lanyard, pulling in of the lanyard by the tensioner is resisted.
- 10 3. A lanyard assembly as defined in claim 1 or 2 including a tensioning cable attached to or comprising the lanyard.
4. A lanyard assembly according to claim 3 wherein in use the tensioning cable is wound up onto and unwound from a reel which is spring biased to wind up the cable.  
15
5. A lanyard assembly according to claim 4 comprising a mounting bracket, a housing for the reel and a flexible conduit extending between the bracket and the housing and through which the tensioning cable runs.
- 20 6. A lanyard assembly according to claim 4 or 5 comprising a ratchet mechanism which can be set to resist rotation of the reel in the unwinding direction, thereby resisting paying out of the lanyard, but additionally and alternatively can be reset to resist rotation of the reel in the winding up direction, thereby allowing paying out of the lanyard and resisting pulling in of the lanyard whilst a snatch connection is made up.
- 25
7. A lanyard assembly according to claim 6 which is biased towards the set condition and is moved to the reset condition by rotation of a key inserted into the assembly, counter-rotation of the inserted key being resisted by a further ratchet mechanism.
- 30 8. A lanyard assembly according to any preceding claim, comprising a brake operable to resist paying out of the lanyard at above a predetermined speed.

9. A snatch disconnection lanyard assembly comprising a resilient link connected to the lanyard, opposed ends of the link each carrying an abutment, the respective abutments being brought into contact with each other when the link has been deformed by a predetermined amount.


5

10. A lanyard assembly according to claim 9 wherein the lanyard has a plurality of ends attached to a connector half at spaced circumferential locations, the link comprising a spreader bar connected between a tensioning cable and the lanyard.

10 11. A lanyard assembly according to any of claims 1-8 and claim 9 or 10.

12. A snatch disconnection lanyard assembly substantially as described with reference to or as shown in the drawings.

Fig 1

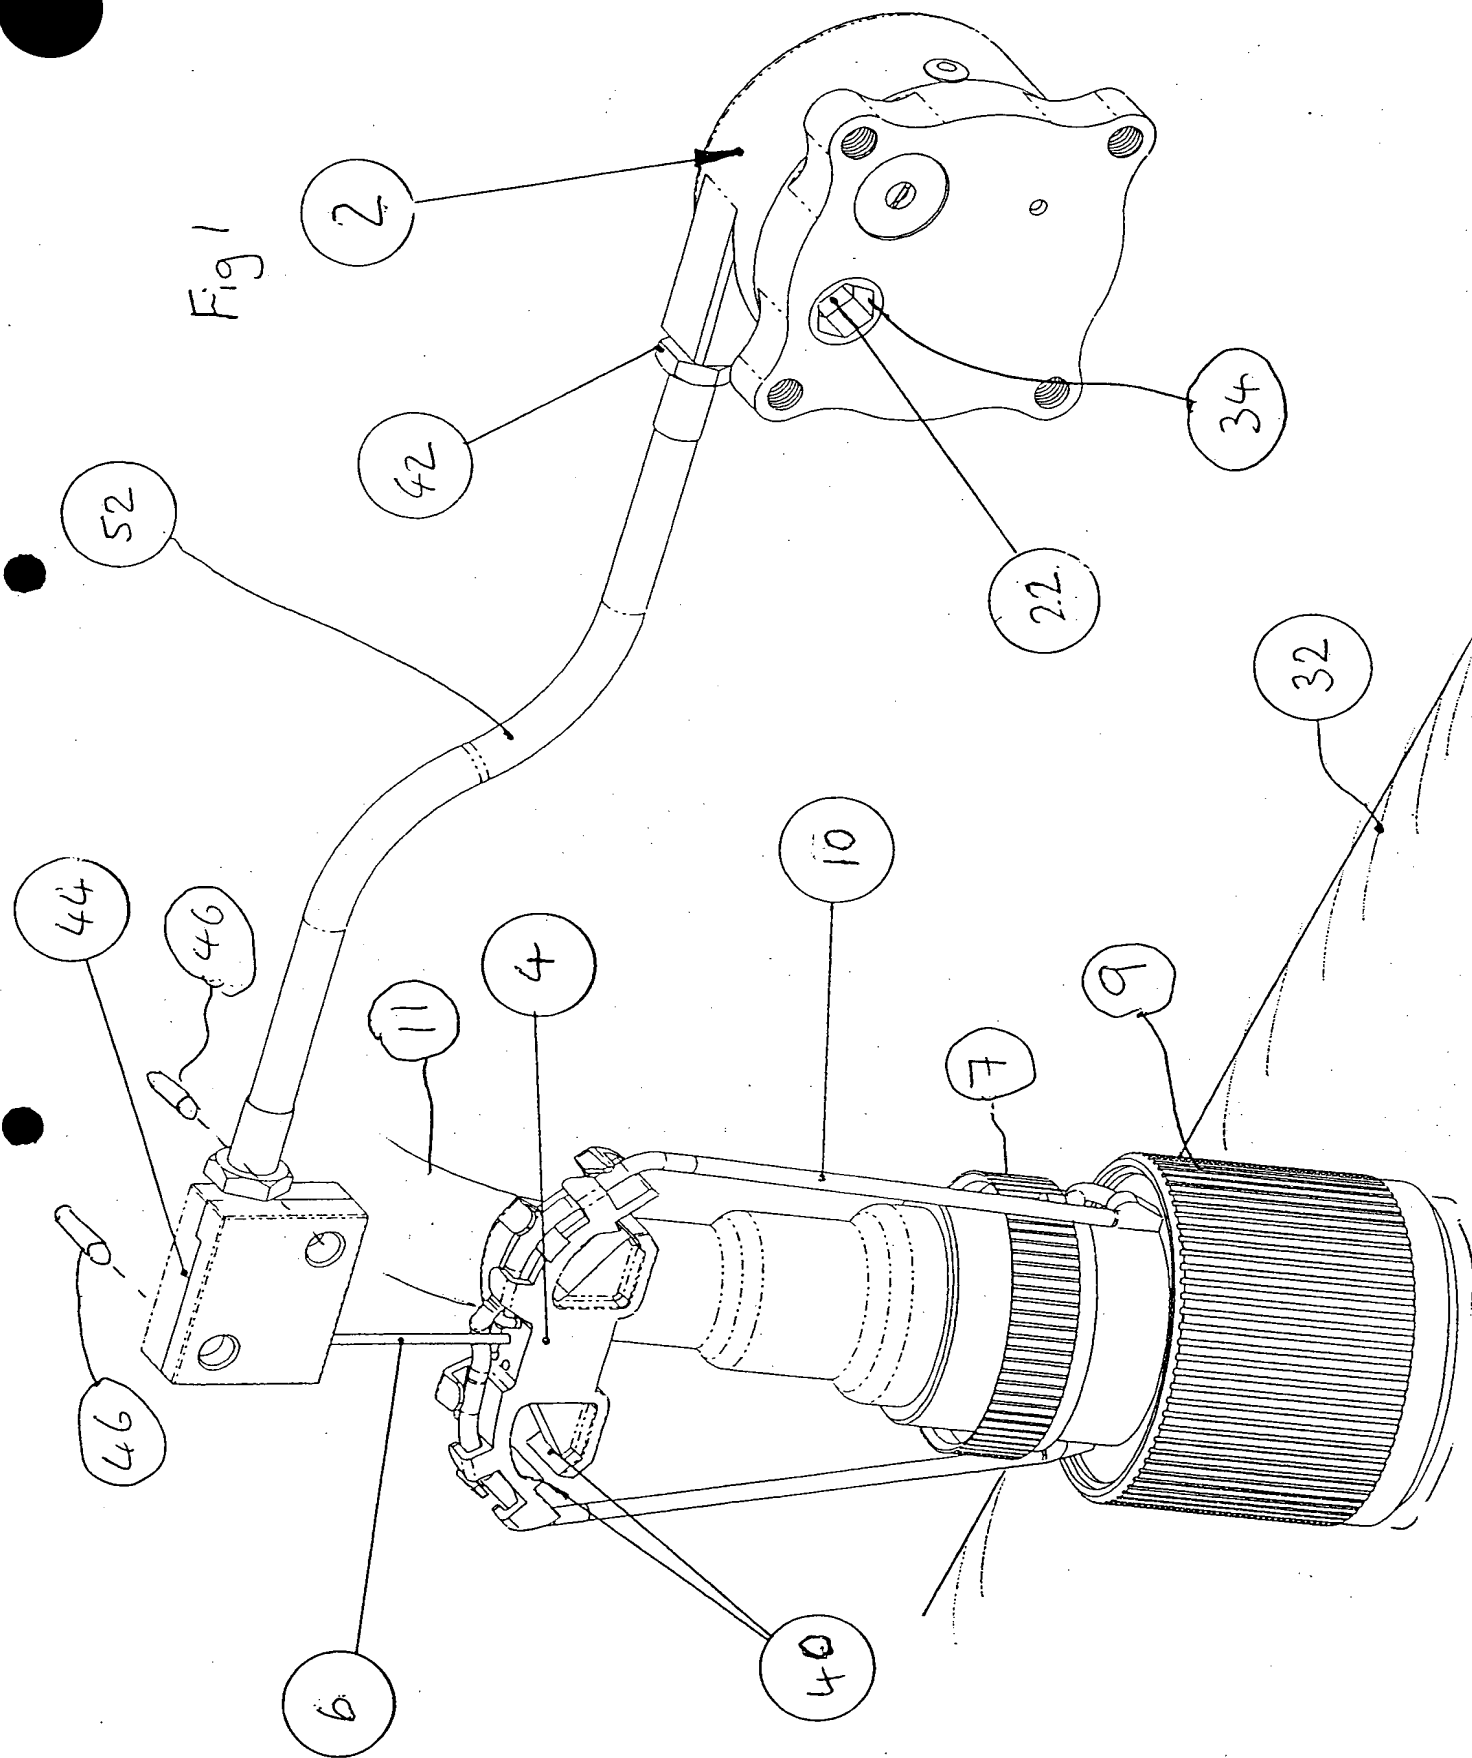



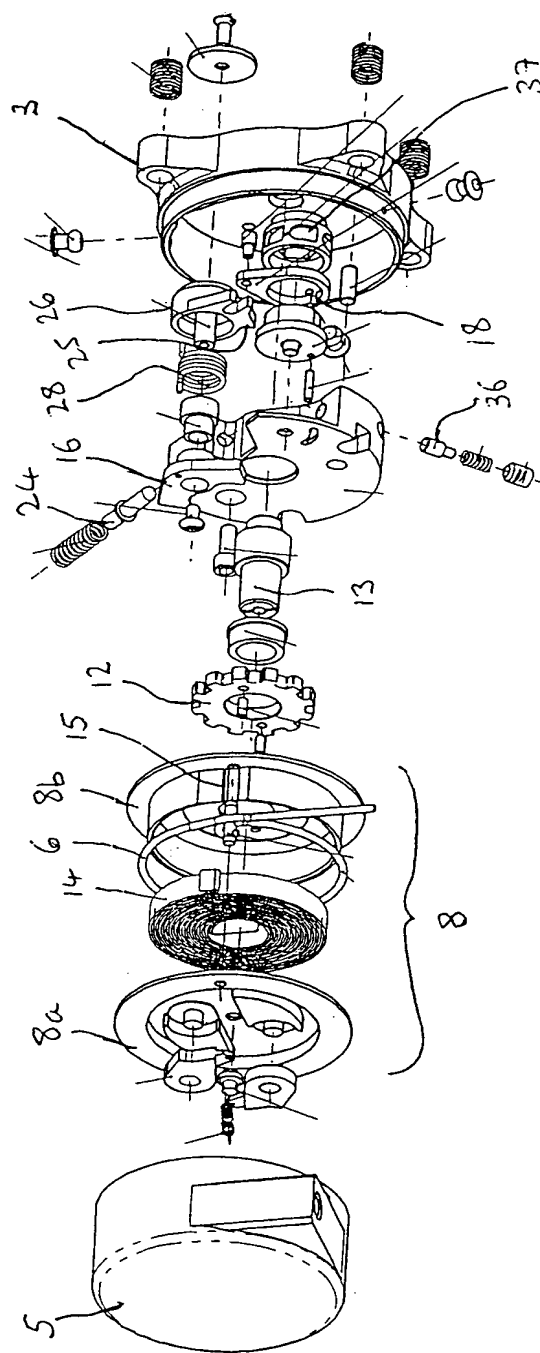
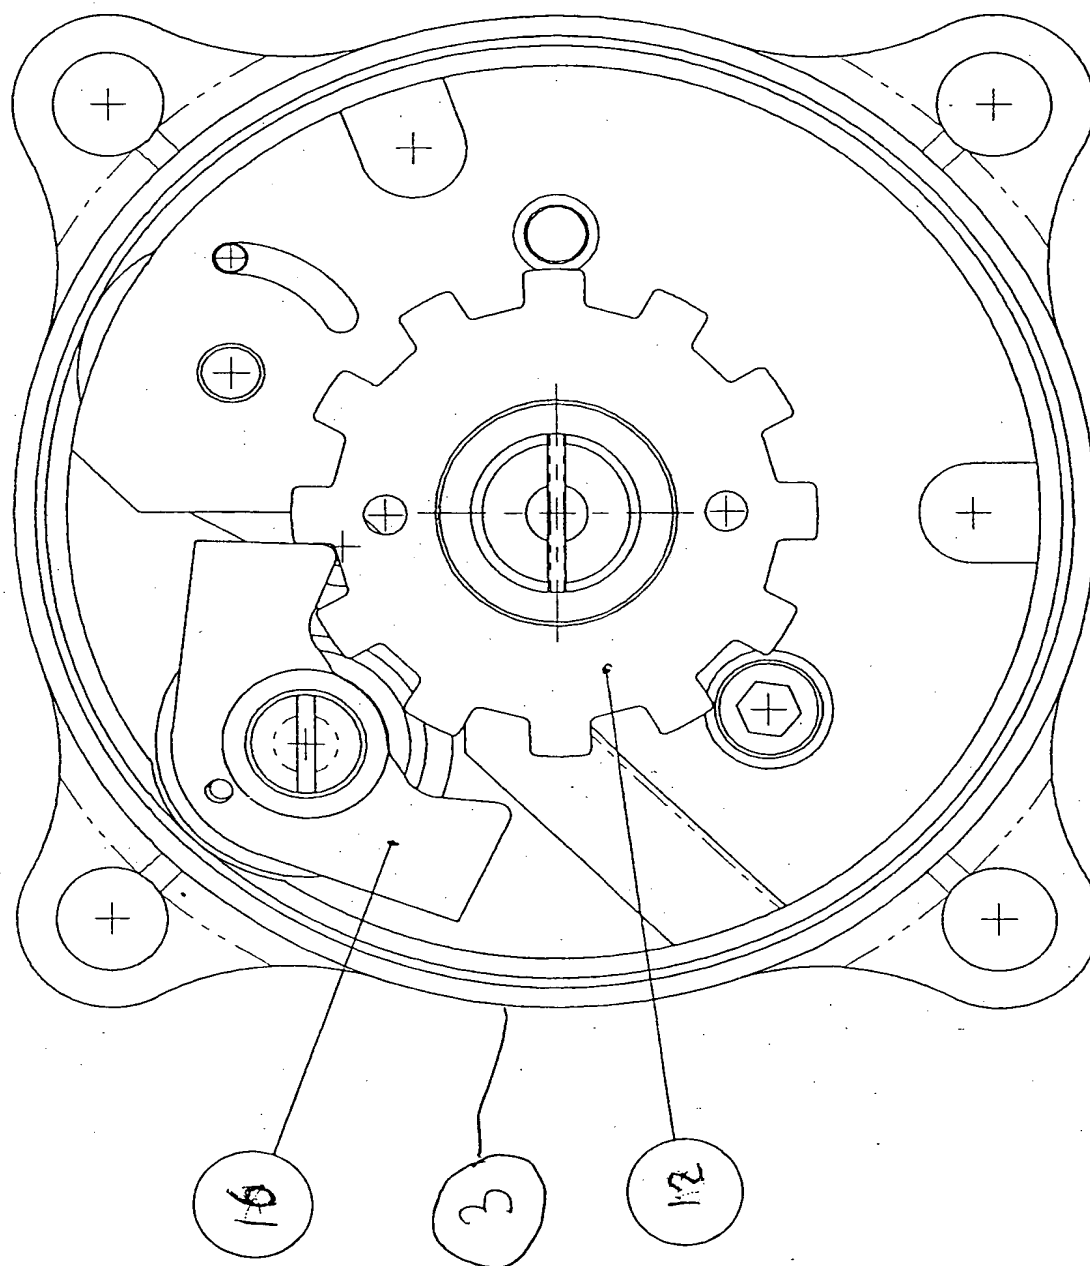


Fig. 2





Fig 3




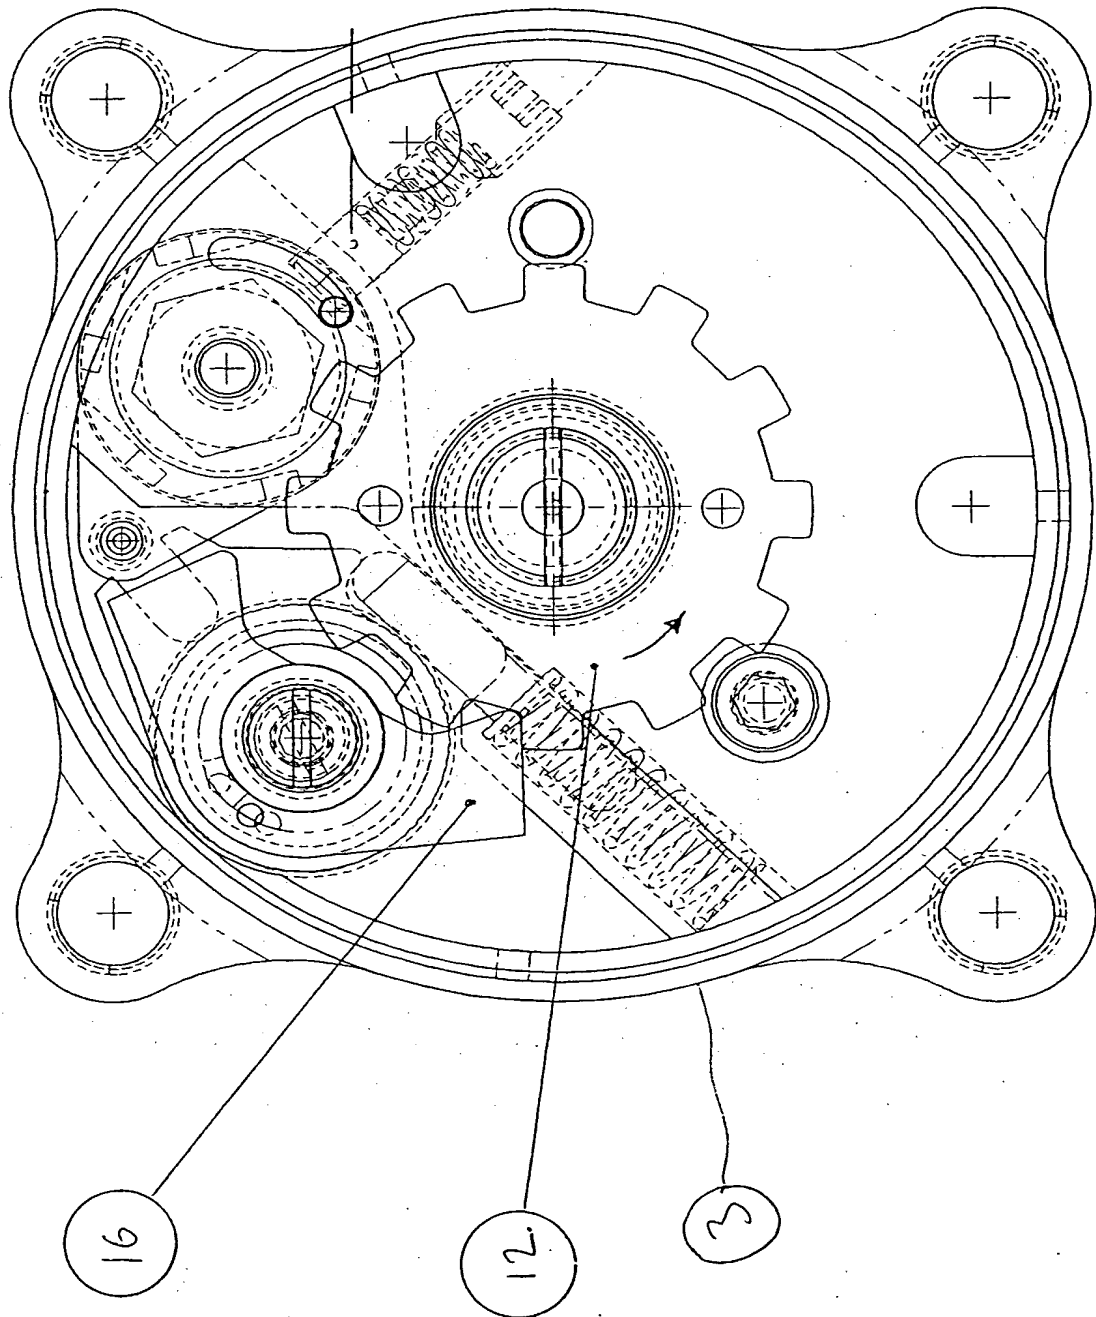


Fig 4





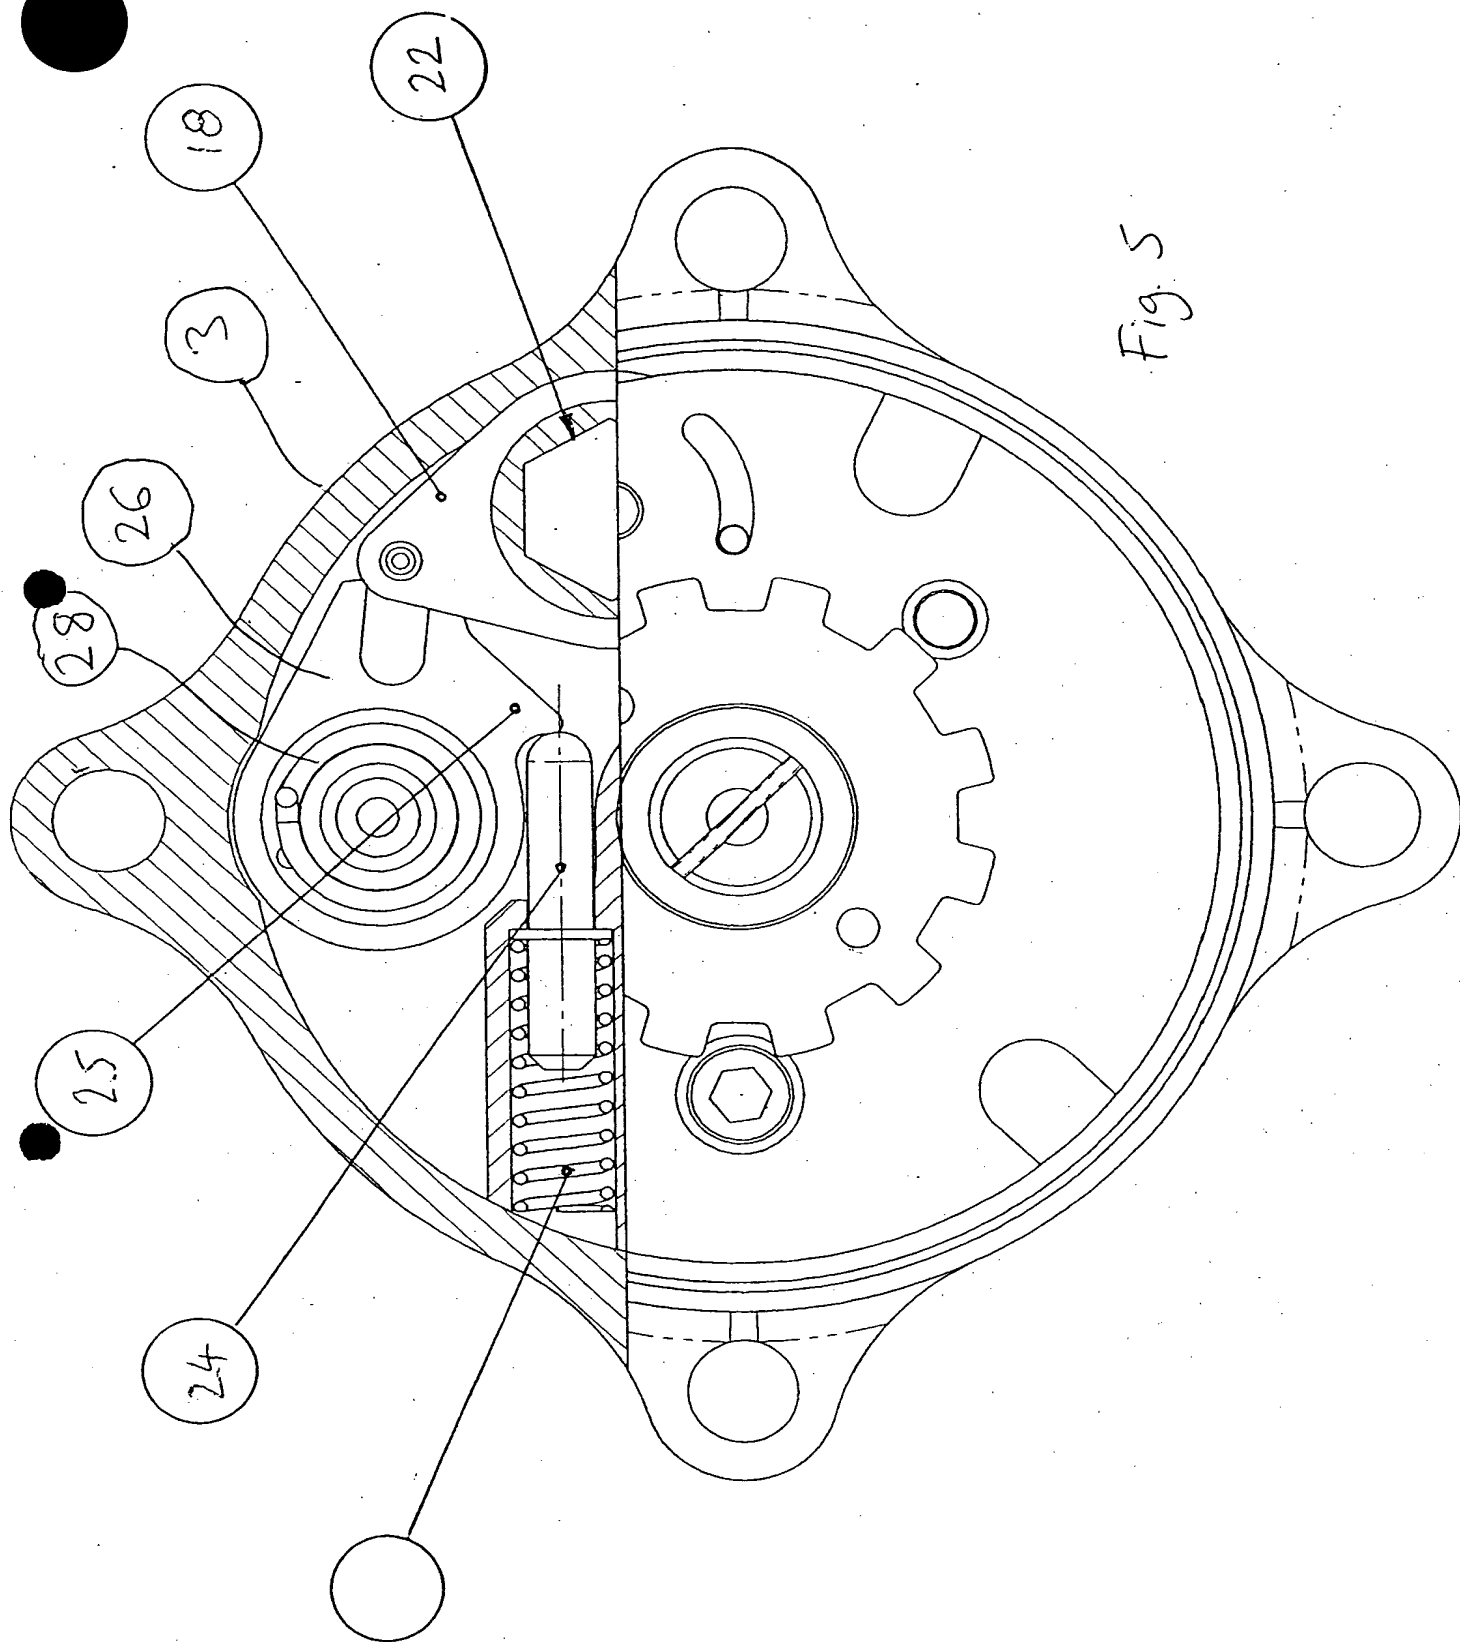



Fig. 5



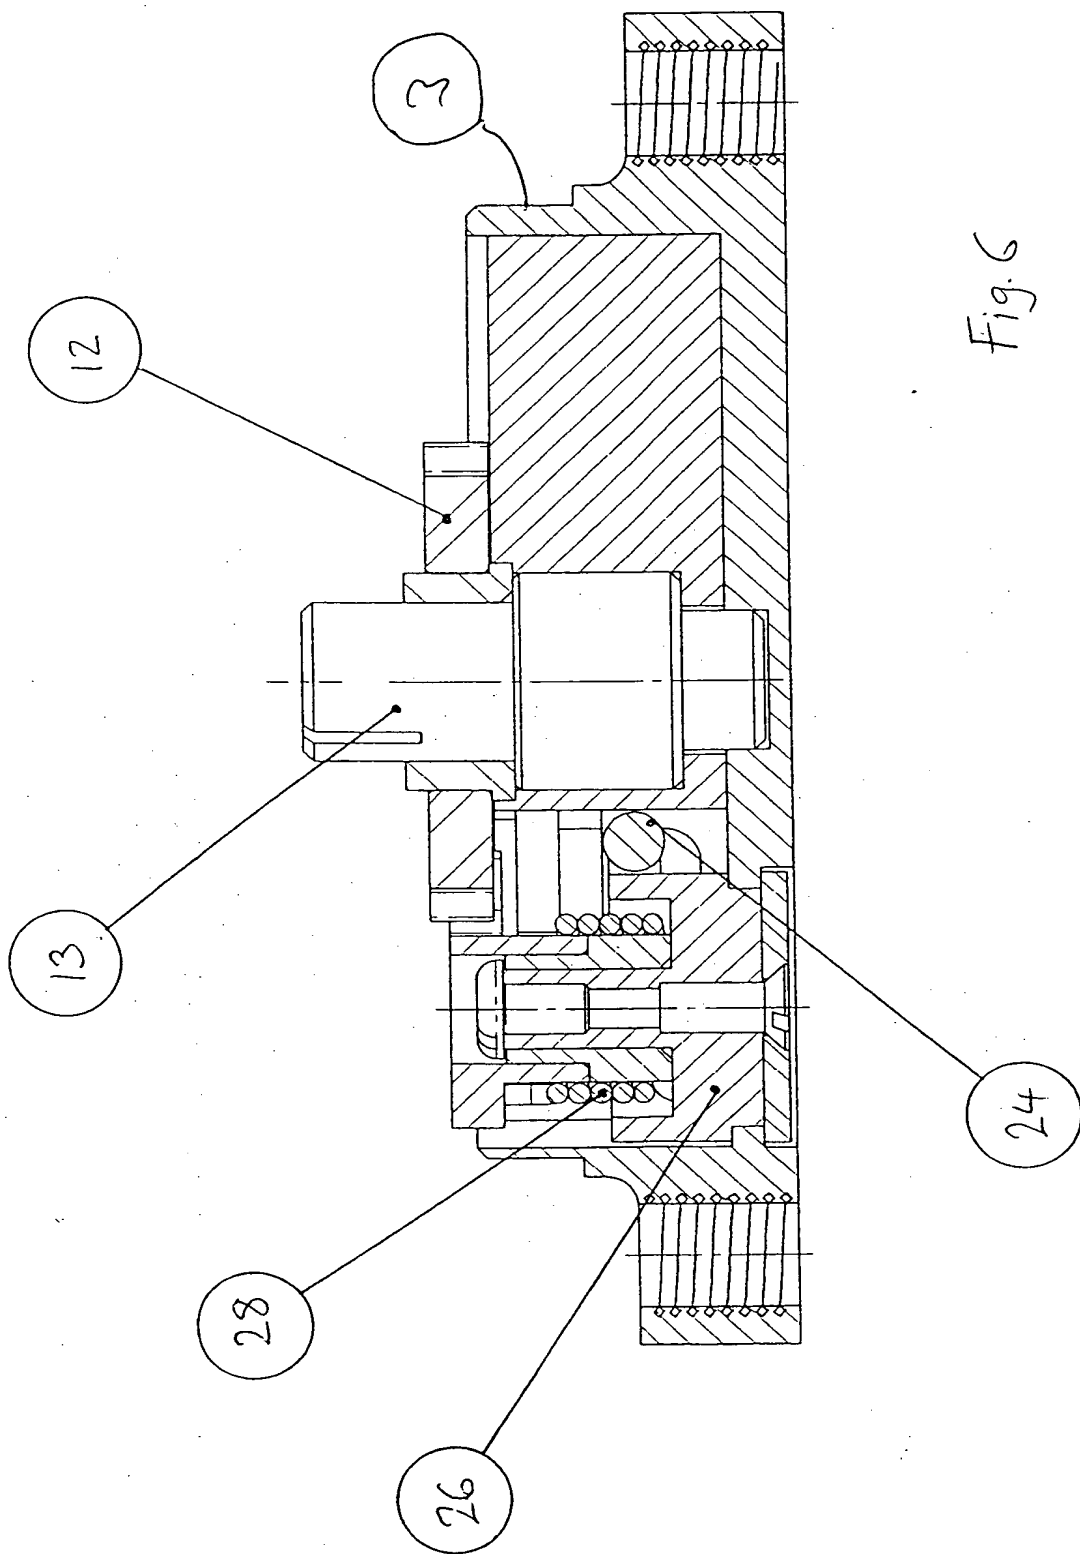


Fig. 6





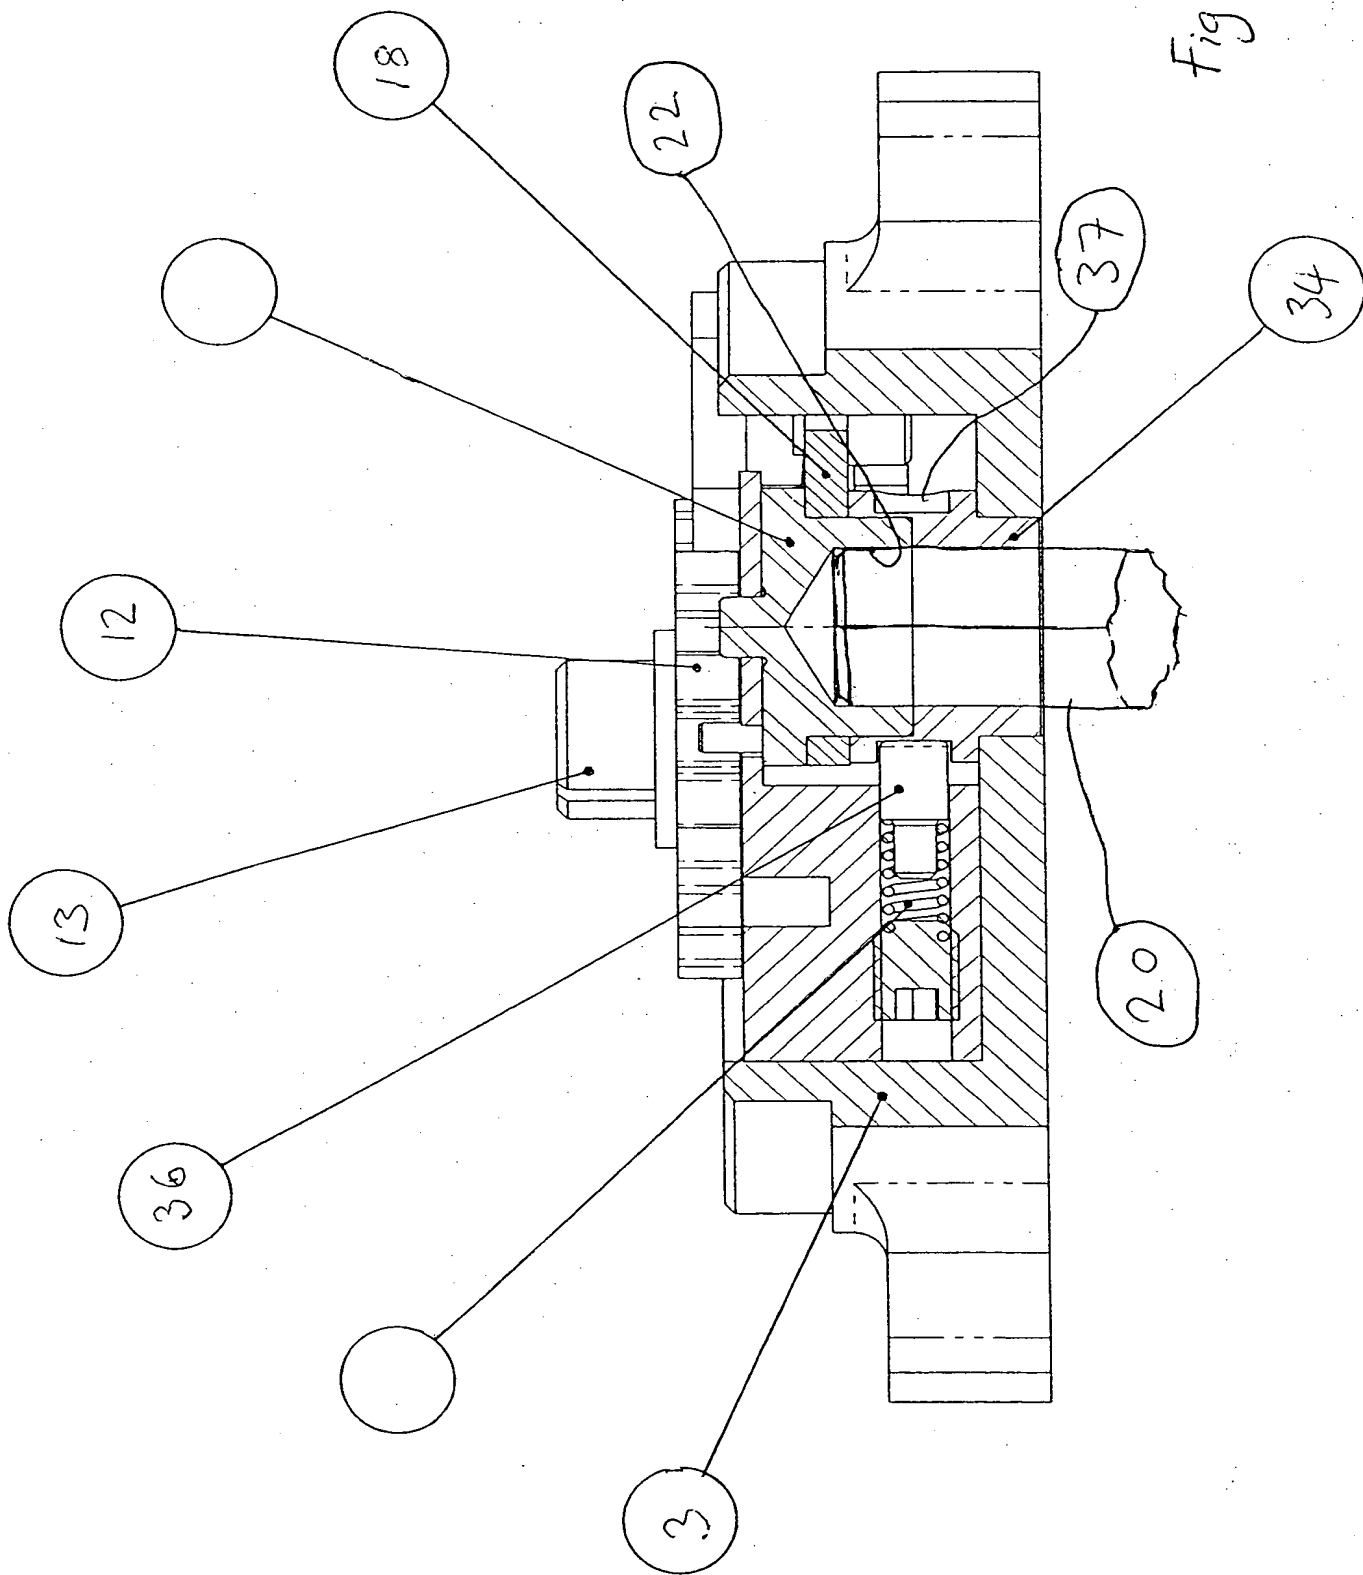


Fig. 7



Fig. 8


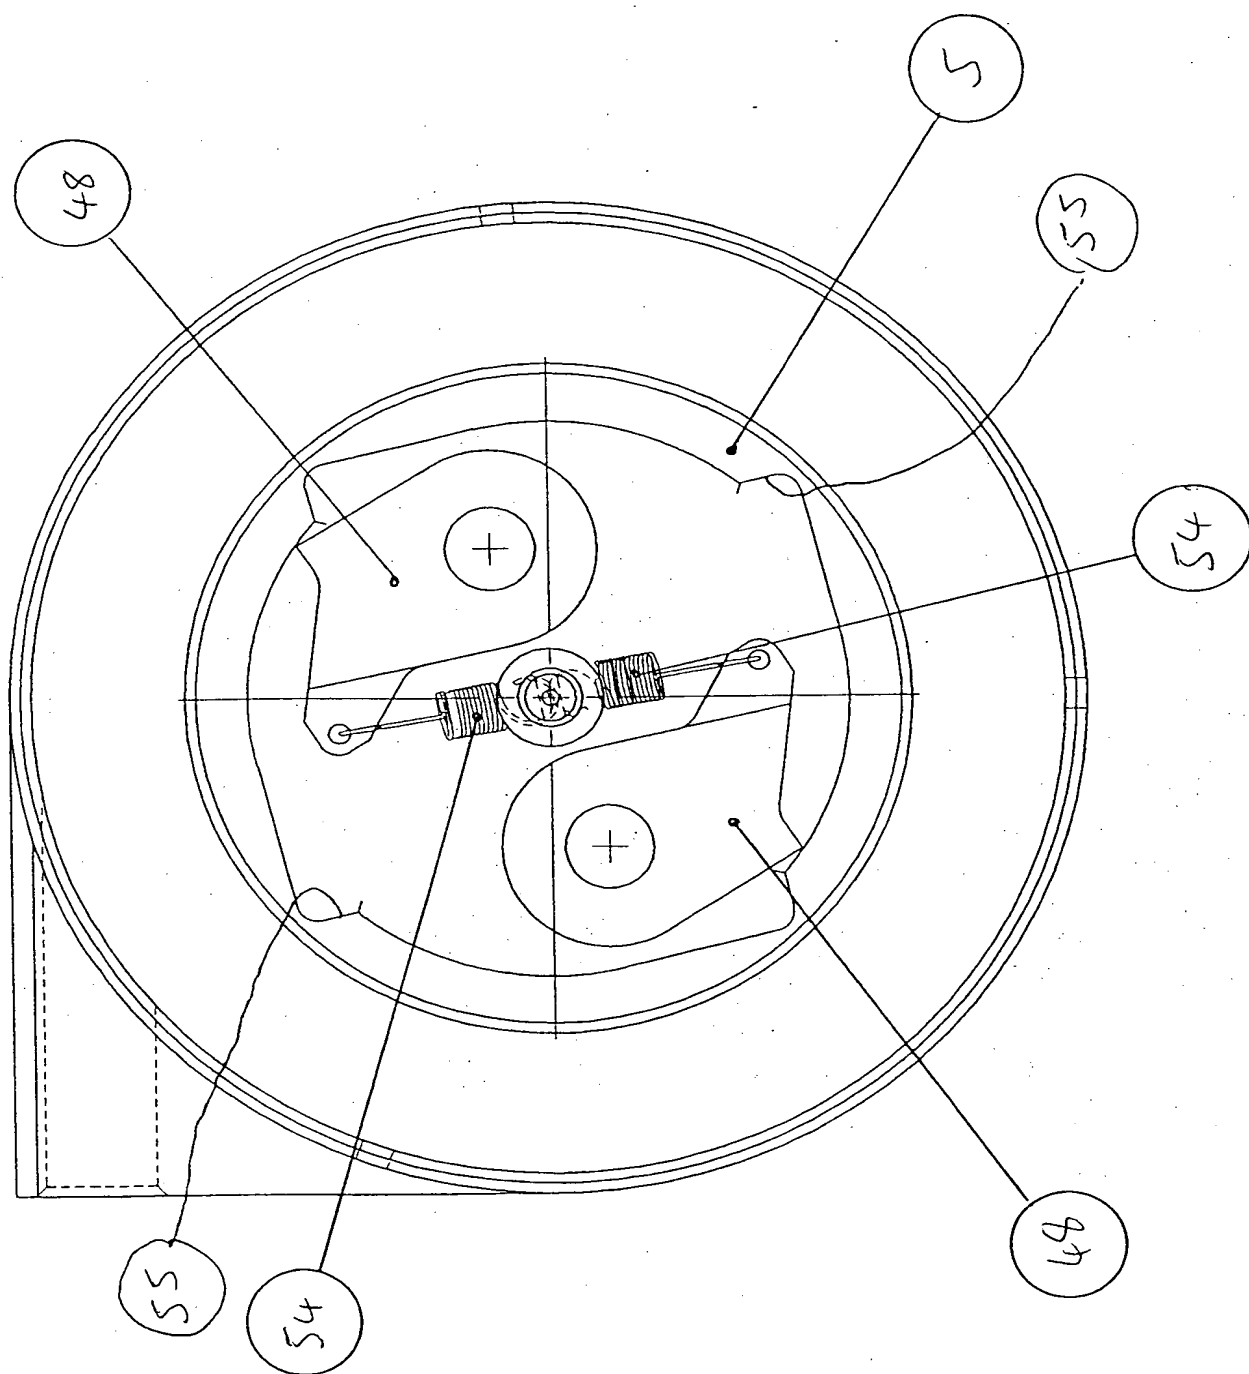




Fig. 9

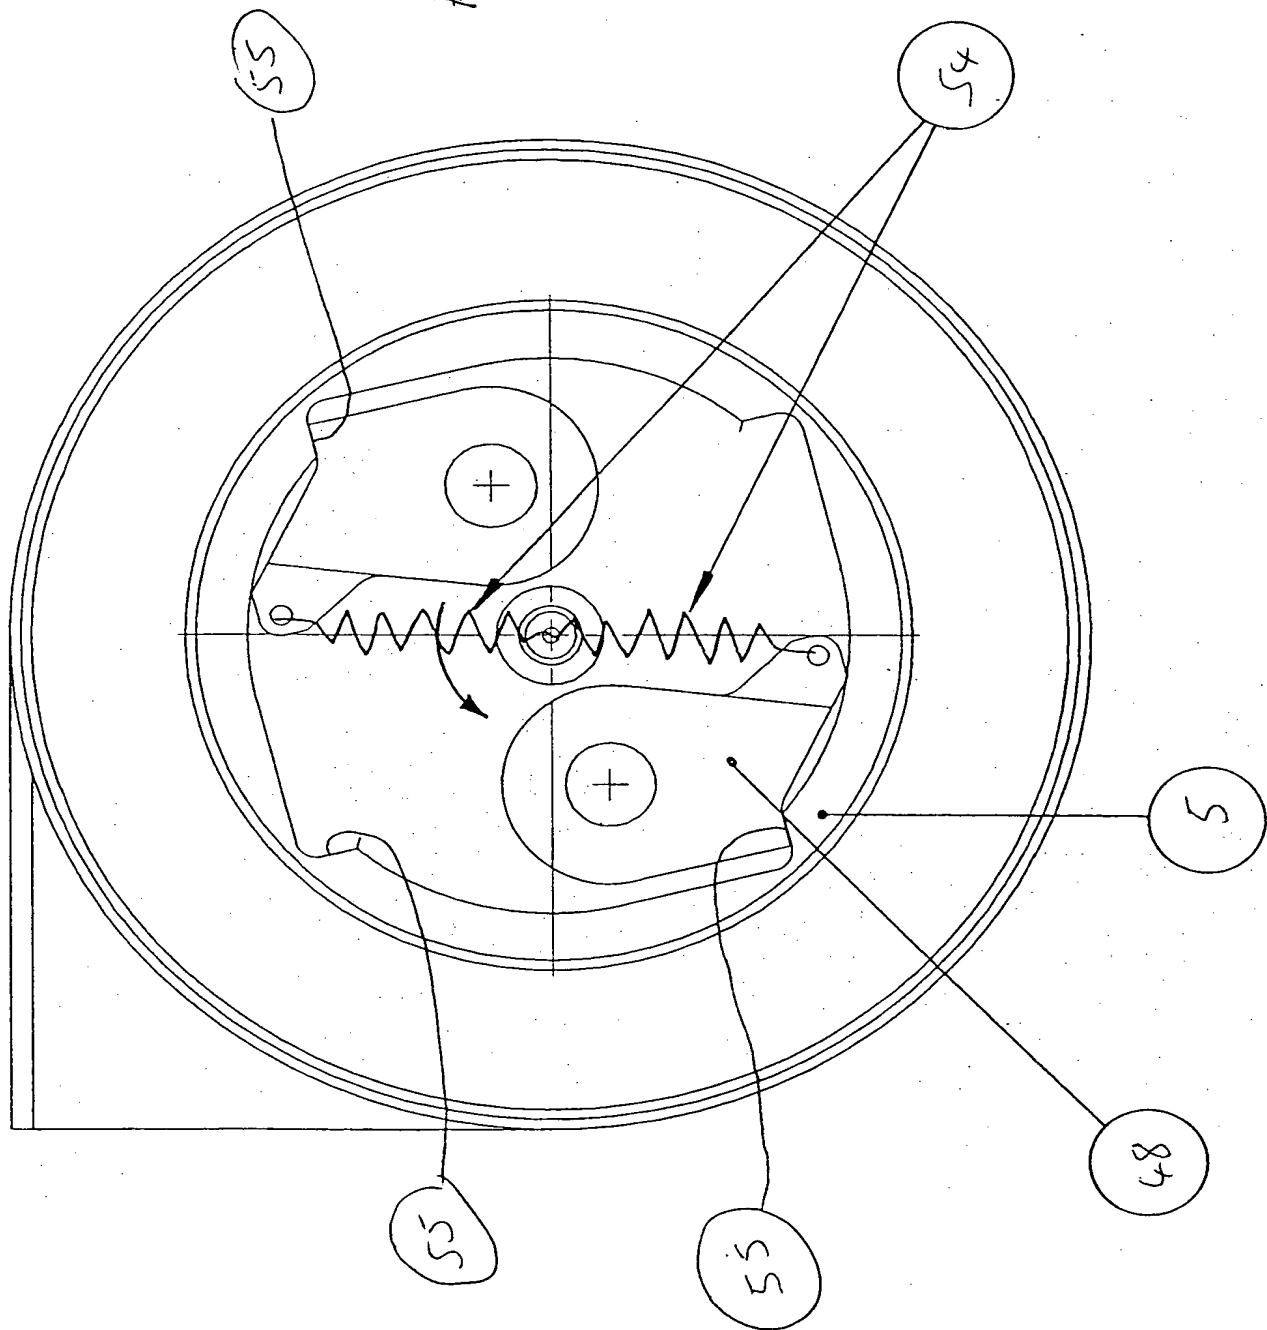

PCT / STB00 / 00141

11/1/00CP

Phillips + Leigh